



**General Description**

Polyfet's GAN (on SiC) HEMT power transistors contain no internal matching; making them suitable for both broadband and narrow band applications. The use of a thermally enhanced package enables this device to have superior heat dissipation properties. The high drain break down voltage permits this device to operate over a wide voltage range.



**RF POWER GAN TRANSISTOR**

160.0 Watts Single Ended

Package Style GX

HIGH EFFICIENCY, LINEAR

HIGH GAIN, LOW NOISE

ROHS COMPLIANT

Suitable for use across 1-2500Mhz

**ABSOLUTE MAXIMUM RATINGS ( T = 25 °C )**

Total Device Dissipation	Junction to Case Thermal Resistance	Maximum Junction Temperature	Storage Temperature	Drain to Source Voltage	Gate to Source Voltage
200 Watts	1.50 °C/W	200 °C	-65 °C to 150 °C	180 V	-10 V to + 2 V

**RF CHARACTERISTICS ( 160.0 WATTS OUTPUT )**



SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Gps	Common Source Power Gain	12			dB	Idq = 0.60 A, Vds = 48.0 V, F = 2,000 MHz
$\eta$	Drain Efficiency		55		%	Idq = 0.60 A, Vds = 48.0 V, F = 2,000 MHz
VSWR	Load Mismatch Tolerance			10:1	Relative	Idq = 0.60 A, Vds = 48.0 V, F = 2,000 MHz

**ELECTRICAL CHARACTERISTICS ( EACH SIDE )**


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Bvdss	Drain Breakdown Voltage	250			V	Ids = 20.00mA, Vgs = -8V
Idsat	Saturation Current		24.00		Amp	Vgs = +2V, Vds = 10V
Idss	Zero Bias Drain Current			8.0	mA	Vds = 48.0 V, Vgs = -8V
Vgs	Gate Bias for Drain Current		-2.5		V	Vds = 48.0 V Ids = 0.60A
Ciss	Common Source Input Capacitance		26.0		pF	Vds = 48.0 Vgs = -8V, F = 1 MHz
Crss	Common Source Feedback Capacitance		1.60		pF	Vds = 48.0 Vgs = -8V, F = 1 MHz
Coss	Common Source Output Capacitance		14.0		pF	Vds = 48.0 Vgs = -8V, F = 1 MHz

# GX4442

POUT VS PIN GRAPH

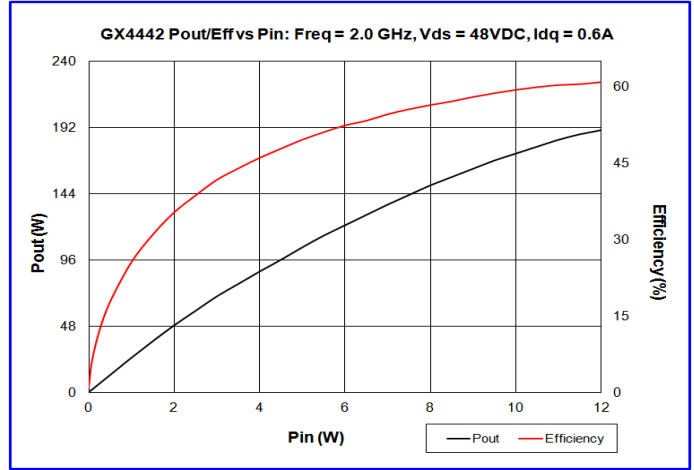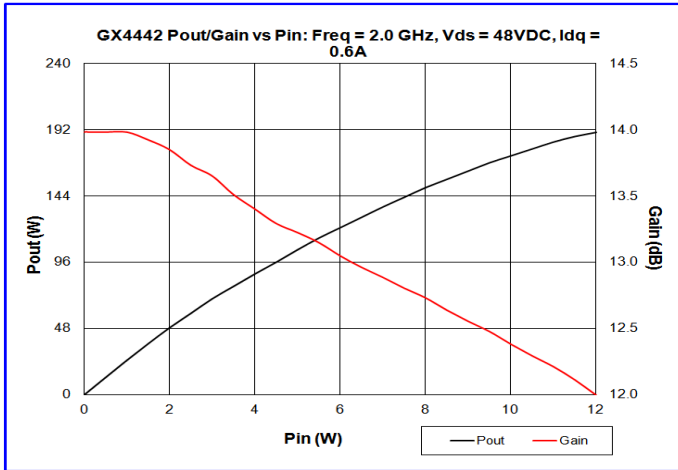

PACKAGE DIMENSIONS IN INCHES

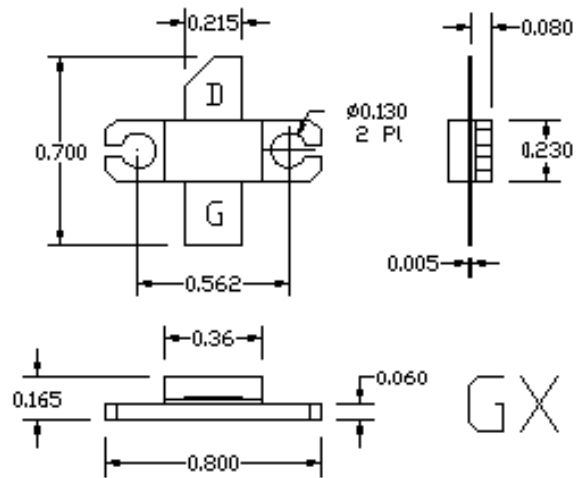

Tolerance .XX +/-0.01 .XXX +/- .005 inches

POLYFET RF DEVICES

REVISION 11/15/2013

1110 Avenida Acaso, Camarillo, Ca 93012 Tel:(805) 484-4210 FAX: (805) 484-3393 EMAIL: Sell@polyfet.com URL: www.polyfet.com